


- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

,


PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER

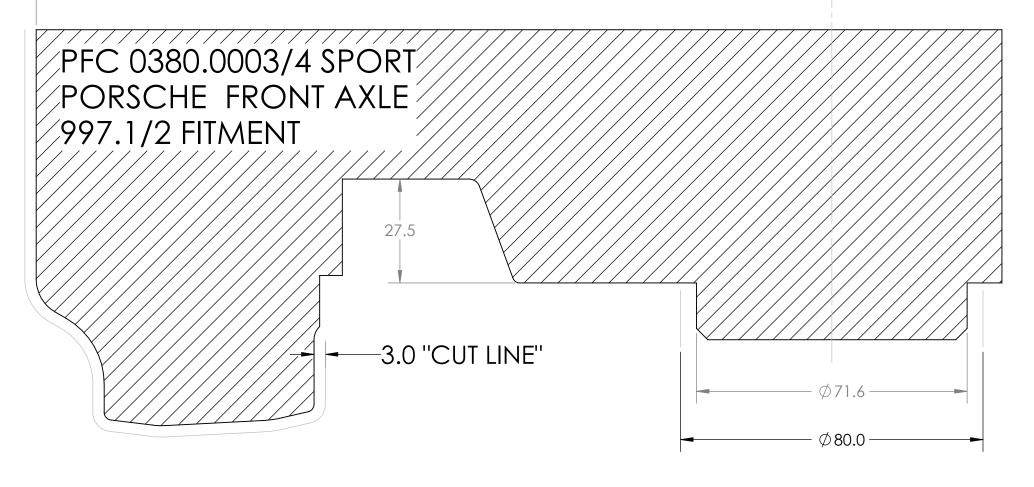

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

4		
Ā		
	4	


PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER

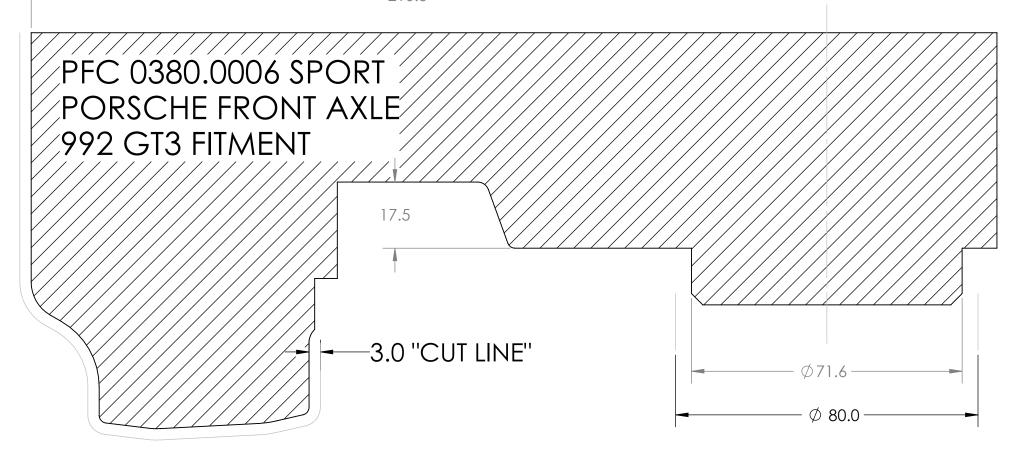

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

4		
Ā		
	4	


PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER

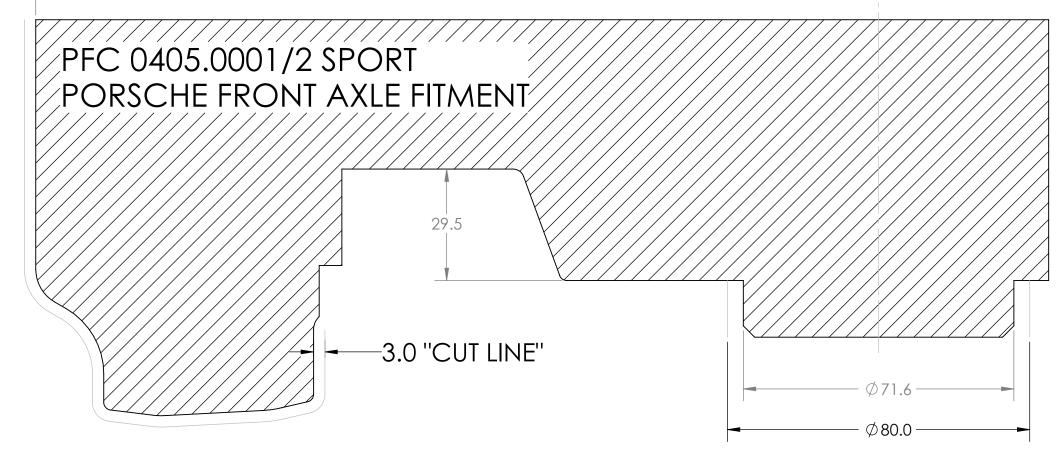

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS
- REQUIRED, RECCOMENDED CLEARANCE IS 5MM.

 3. MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER

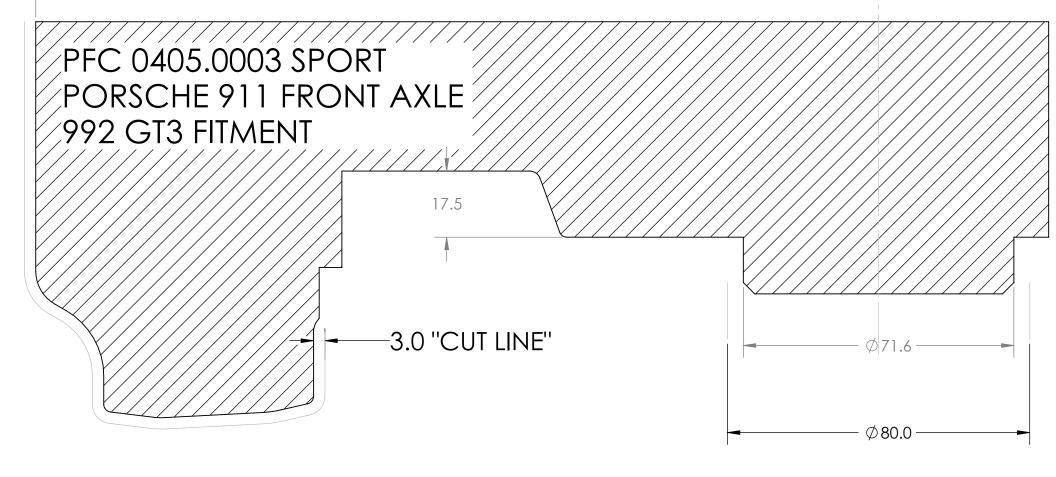


- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS
- REQUIRED, RECCOMENDED CLEARANCE IS 5MM.

 3. MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

_
\supset


PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER

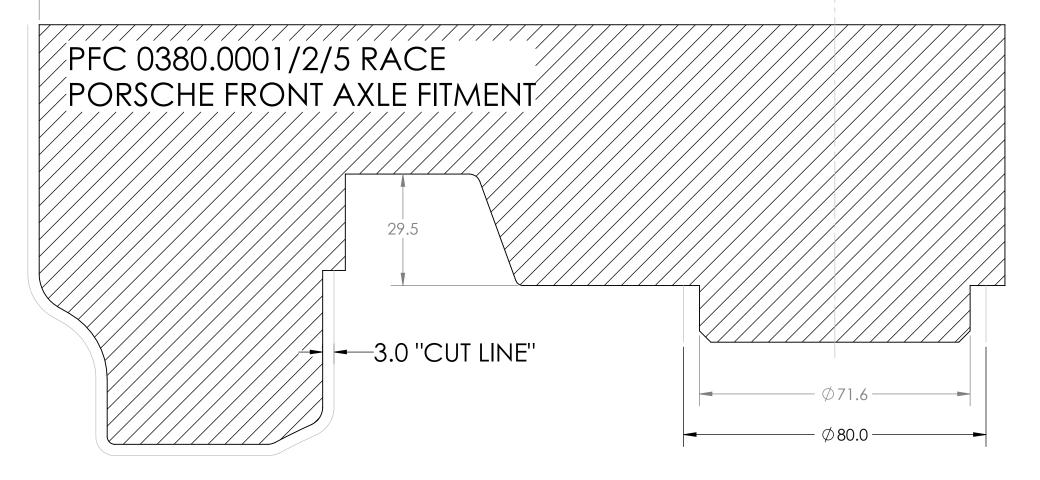

- ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL


3,5	

PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER

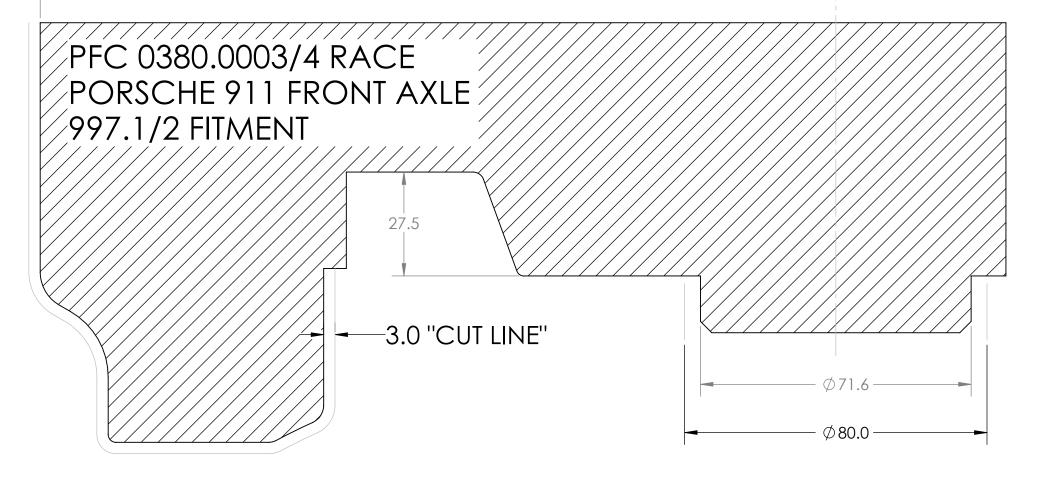

- ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL


PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER

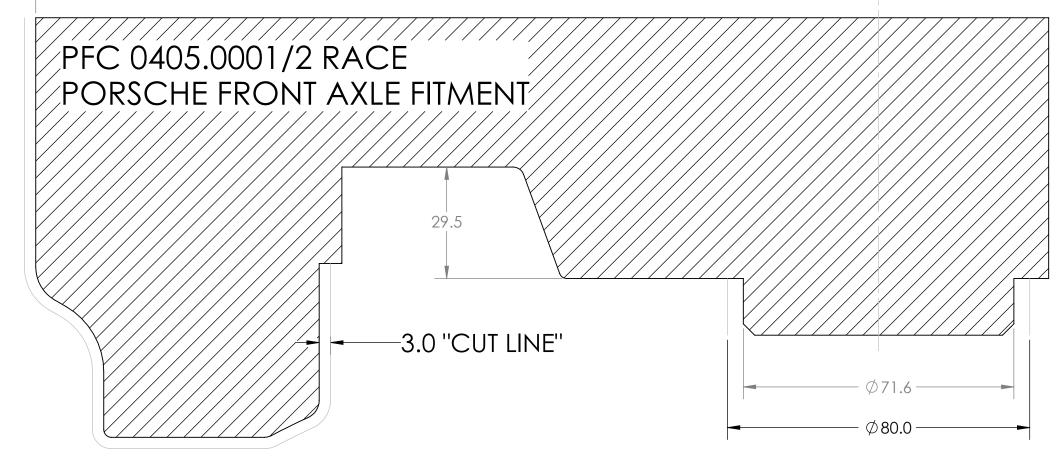

- ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

=/		•

PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER

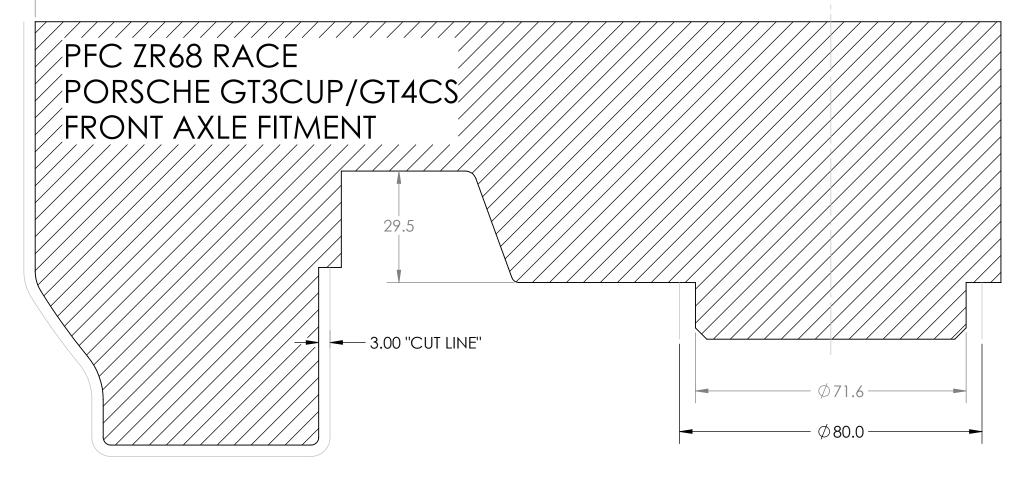

- ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

,

PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER