


NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

3,5	

PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR96 PROFILES - PORSCHE	01/07/22	J. BORNER

PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY CLOVER, SC 29710

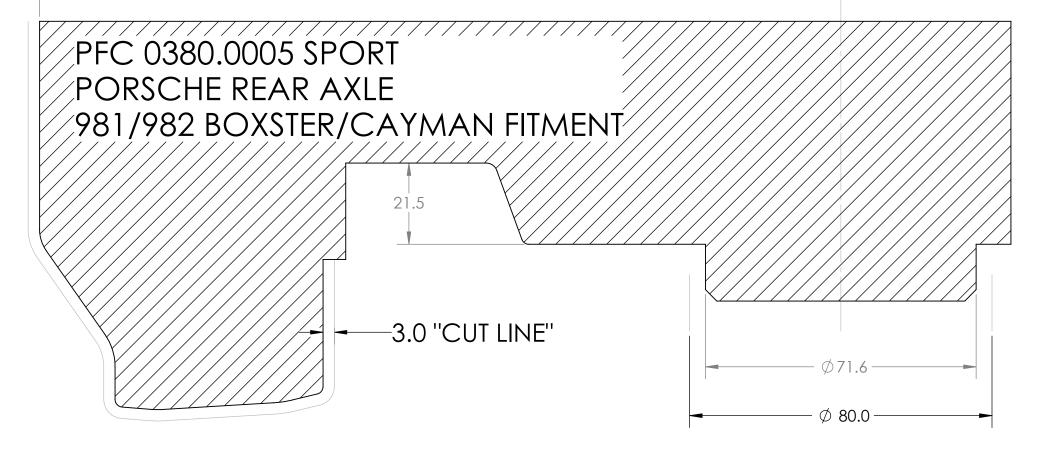


NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

4		
Ā		

PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR96 PROFILES - PORSCHE	01/07/22	J. BORNER

PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY CLOVER, SC 29710

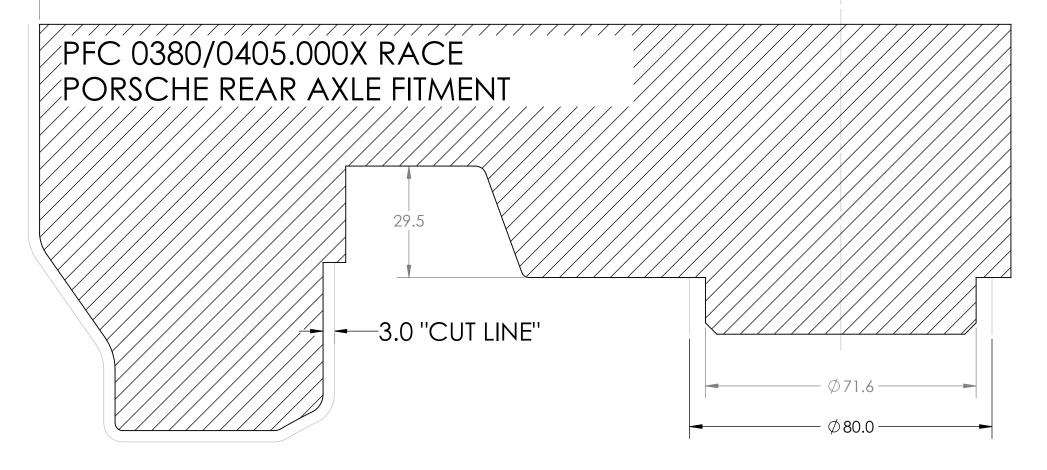

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
 MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

4		
Ā		

PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY
NA	ZR96 PROFILES - PORSCHE	01/07/22	J. BORNER

PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY CLOVER, SC 29710